



The 6x6 series is ideal for hallways, lobbies or other commercial applications where modern direct lighting may be utilized

Features and Specifications:

Construction:

- Bodies and ends are die form code gauge cold rolled steel for strength and uniformity
- Precision fabricated steel housings are an economic alternative to extruded aluminum
- Lift and shift frosted acrylic diffuser

Size Options:

- Available in 4', 6' and 8' lengths (nominal)

Listing & Ratings:

- All electrical components are U.L. listed or recognized
- All fixtures are U.L. Certified and Union made in the USA
- Meets Buy America Act (BAA), BABA Compliant

Mounting Options:

- Surface or cable mount (specify "AC" when ordering)

Driver:


- Universal voltage 120-277V standard
- Custom driver tuning available for specific lumen requirements
- 0-10V or Lutron dimming

Warranty:

- 5 years - part replacement only (see our terms & conditions page at www.lamarled.com for details)

See page 2 for lumen chart & dimensions

66LS 6x6 linear direct surface/suspended

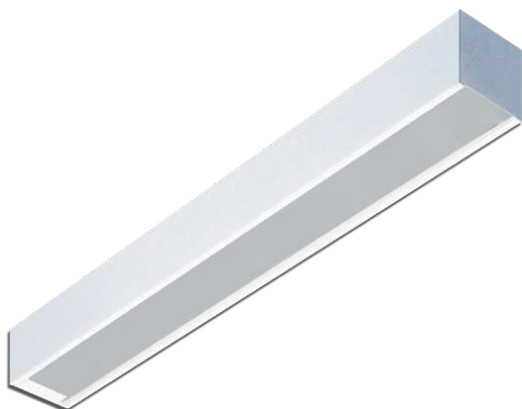

Ordering Guide / Example

66LS48-40D

66LS				
Series	Size	Power	CCT	General Options
66LS = Direct surface/suspended	48 = 4' nominal 72 = 6' nominal 96 = 8' nominal	L = Low M = Medium H = High	80 CRI 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 90 CRI 930 = 3000K 935 = 3500K 940 = 4000K 950 = 5000K	EM = Emergency pack >90 min., >500 lumens (higher output & run time available - consult factory - 3'-8' only) EMB = BABA Compliant Emergency pack >90 min., >500 lumens D = 0-10V dimming to 1% (standard) DTD = 0-10V Dim to Dark LDH = Lutron EcoSystem Hi-lume digital 1% w/Fade to Black MX1 or MX2 = 2-wire 120V or 277V 5% phase cut dimming AC = 4ft aircraft cable mount


Consult factory for additional options not shown or listed
4ft AC cable kits and pre-wired power drop included with -AC option,
other lengths available - consult factory

Correlated Color Temperatures (CCTs) fall within the nominal range as per ANSI C78.377A

Project Information:

Job Name:	Fixture Type:
Catalog #:	Date:
Comments:	

Certification & Listings:

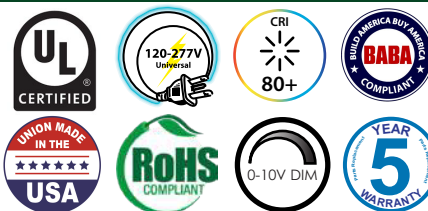





66LS

6x64 linear direct
surface/suspended

BEFORE INSTALLATION, PLEASE CONSULT YOUR LOCAL ORDINANCES AND BUILDING CODES FOR COMPLIANCE

Dimensions

Top View

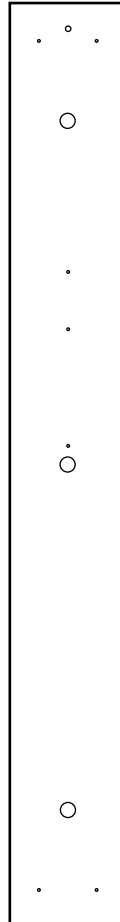

Length Chart

Size	
4'	46"
6'	69"
8'	92"

LED Lumen/Wattage Chart - 4000K

Low	Medium	High
23W	34W	45W
2310 Lu	3180 Lu	4000 Lu

Lumen Multipliers

3000K	.95
3500K	.97
5000K	1.03

LAMAR LED assumes no responsibility for misapplication of fixtures due to the rapid advancements in LED technology, please consult our website for the most current technical data.

Specifications subject to change without notice - Rev 1125

LAMARLED 1150 Motor Pkwy, Central Islip, NY 11722 | tel 631.777.7700 fax 516.333.7695 | www.lamarled.com